










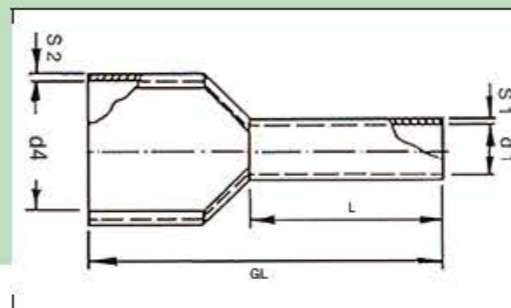




Twin-Aderendhülsen für zwei Leiter, DIN

- Rohrabschnitt aus Elektrolyt-Kupfer
- galvanisch verzinkt
- Kunststoffkragen aus PP
- wärmebeständig bis 105°C



Art. Nr.	LQ		d1	s	GL	l	kg/100		VE	
270778	0,5	weiß	1,5	0,15	15,0	8	0,011		100	
270780	0,75	grau	1,8	0,15	15,0	8	0,013		100	
270782		grau	1,8	0,15	17,0	10	0,014		100	
270784	1	rot	2,05	0,15	15,0	8	0,014		100	
270787		rot	2,05	0,15	17,0	10	0,015		100	
270788	1,5	schwarz	2,3	0,15	16,0	8	0,017		100	
270790		schwarz	2,3	0,15	20,0	12	0,022		100	
270792	2,5	blau	2,9	0,2	18,5	10	0,029		100	
270794		blau	2,9	0,2	21,5	13	0,033		100	
270796	4	grau	3,8	0,2	23,0	14	0,049		100	
270797	6	gelb	4,9	0,2	25,0	14	0,072		100	
270798	10	rot	6,5	0,2	26,0	14	0,090		100	
270799	16	blau	8,3	0,2	31,0	16	0,078		50	