


## TZ Wandgeräte (WKE) | Superkompakt | R32

### TZ Wandgeräte – superkompakt und leise

Die perfekte Lösung für eine platzsparende Montage. Die TZ Wandgeräte mit dem Kältemittel R32 sind leistungsstark und energieeffizient und haben einen integrierten WLAN-Adapter.

- Compact design with 779 mm (1102 mm for 6 and 7.1 kW)
- Built-in Wi-Fi Panasonic Comfort Cloud for internet control
- Compatible with voice control
- Infrared control Sky Controller
- PM2,5 Filter to create clean and comfortable indoor air quality
- Super Quiet operation
- Aerowings to control air draft direction
- High energy savings
- Wired control (Optional)

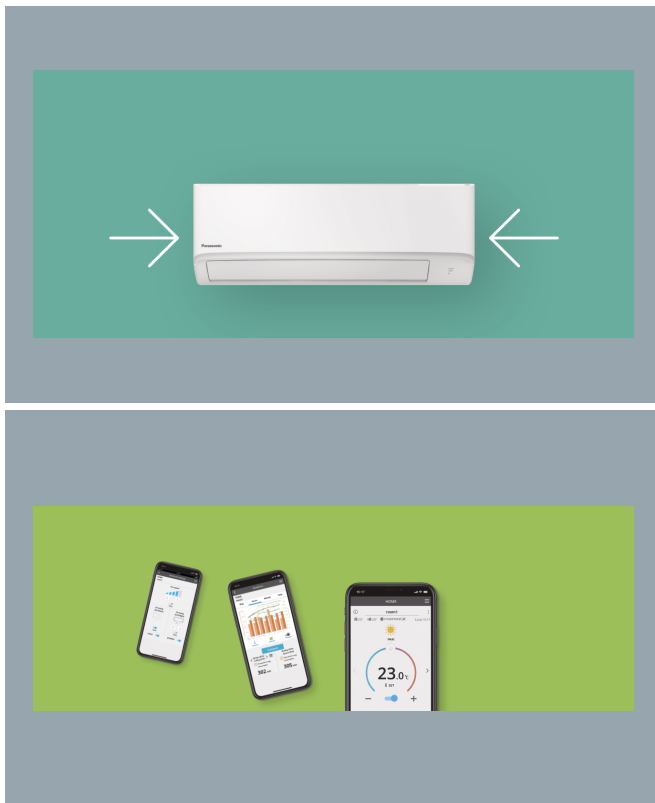

### Nur 779 mm Breite TZ Wandgeräte – superkompakt und leise

[WEITERE INFORMATIONEN ZU DEN TZ WANDGERÄTEN](#)

[WEITERE INFORMATIONEN ZU SUPERKOMPAKTEN WANDGERÄTEN](#)

### Internet-Steuerung mit der App – Panasonic Comfort Cloud? Zentrale Steuerung bequem per Smartphone-App

[WEITERE INFORMATIONEN](#)

TZ Wandgeräte (WKE)   Superkompakt   R32		Einphasig
Kit		KIT-TZ20-WKE
Cooling capacity (Nominal)	kW	2,00
Cooling capacity (Min)	kW	0,75
Cooling capacity (Max)	kW	2,40
EER (Nominal) (1)	W/W	4,08
EER (Min) (1)	W/W	4,17
EER (Max) (1)	W/W	4,00
SEER (2)		7,00 A++
Pdesign (cooling)	kW	2,00
Input power cooling (Nominal)	kW	0,49
Input power cooling (Min)	kW	0,18
Input power cooling (Max)	kW	0,60
Annual energy consumption cooling (3)	kWh/a	100,00
Heating capacity (Nominal)	kW	2,70
Heating capacity (Min)	kW	0,70
Heating capacity (Max)	kW	3,60
Heating capacity at -7°C	kW	2,14
COP (Nominal) (1)	W/W	4,15
COP (Min) (1)	W/W	4,24
COP (Max) (1)	W/W	3,53
SCOP (2)		4,60 A++
Pdesign at -10°C	kW	1,90
Input power heating (Nominal)	kW	0,65
Input power heating (Min)	kW	0,17
Input power heating (Max)	kW	1,02
Annual energy consumption heating (3)	kWh/a	578
Indoor unit		CS-TZ20WKEW
Indoor power source	V	230
Indoor recommended fuse	A	16
Indoor connection indoor / outdoor	mm <sup>2</sup>	4 x 1,5
Indoor air flow (Cool)	m <sup>3</sup> /min	10,3
Indoor air flow (Heat)	m <sup>3</sup> /min	10,8
Moisture removal volume	L/h	1,3
Indoor sound pressure (Cool -Hi) (4)	dB(A)	37
Indoor sound pressure (Cool -Lo) (4)	dB(A)	25
Indoor sound pressure (Cool -Q-Lo) (4)	dB(A)	20
Indoor sound pressure (Heat -Hi) (4)	dB(A)	38
Indoor sound pressure (Heat -Lo) (4)	dB(A)	26
Indoor sound pressure (Heat -Q-Lo) (4)	dB(A)	22
Indoor dimension (Height)	mm	290
Indoor dimension (Width)	mm	779
Indoor dimension (Depth)	mm	209
Indoor net weight	kg	8
Outdoor unit		CU-TZ20WKE
Outdoor air flow (Cool)	m <sup>3</sup> /min	29,7
Outdoor air flow (Heat)	m <sup>3</sup> /min	29,7
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	46
Outdoor sound pressure (Heat -Hi) (4)	dB(A)	47
Outdoor dimension (Height) (5)	mm	542
Outdoor dimension (Width) (5)	mm	780
Outdoor dimension (Depth) (5)	mm	289
Outdoor net weight	kg	24
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)
Pipe length range	m	3 ~ 15
Elevation difference (in/out) (6)	m	15
Pipe length for additional gas	m	7,5
Additional gas amount	g/m	10
Refrigerant (R32) / CO2 Eq.	kg / T	0,54 / 0,365
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Max)	°C	+43
Operating range (Heat - Min)	°C	-15
Operating range (Heat - Max)	°C	+24

• Superkompakte Wandgeräte mit nur 779 mm Breite (TZ20, TZ25, TZ35, TZ42, TZ50) bzw. 1.102 mm Breite (TZ60, TZ71).


- Integrierter WLAN-Adapter für Internet-Steuerung mit der App „Panasonic Comfort Cloud“
- Bedienung per Sprachsteuerung möglich

- Infrarot-Fernbedienung „Sky Controller“ im Lieferumfang enthalten
- Feinstaubfilter (PM2,5) für gesunde, saubere Raumluft
- Äußerst geräuscharmer Betrieb
- Aerowings für eine optimierte Luftführung
- Hohe Energieeffizienz
- Optionale Kabelfernbedienung

## Zubehör



Wired Remote Control  
CZ-RD514C

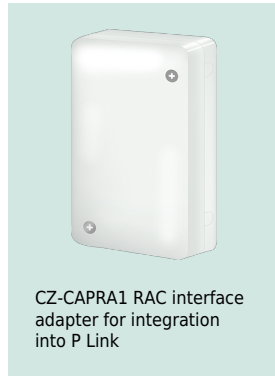

CZ-CAPRA1 RAC interface  
adapter for integration  
into P Link