

APZ104-850 Flexible Low

Shower drain with an edge for perforated grids and adjustable vertical flange to the wall

Application


- For wheelchair access
- For sites with limited floor height
- For drainage of floor-level showers
- For installation directly to the wall
- For perforated stainless steel grids
- For indoor use

Features

- Better and safer transition of the insulation from the floor to the wall
- The collar and trap are protected by foil, and the channel itself by a polystyrene insert
- Trap material: polypropylene
- Shower drain material: stainless steel 2 mm, AISI 304, DIN 1.4301
- Mechanically cleanable trap up to the waste pipe
- Adjustable vertical insulating collar for tiles with a thickness of 6–12 mm
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Trap firmly connected to the drain – 100% waterproofing
- Installation height from 55 mm
- Facilitates the inclination of the floor
- Adjustable height
- The high flow rate is achieved due to the double compartment trap system
- 25 years guarantee

Scope of supply

- Anchoring set: screw $\varnothing 6 \times 50$ – 2 pcs, dowel $\varnothing 10$ – 2 pcs, screw $\varnothing 4.2 \times 38$ – 3 pcs, dowel $\varnothing 8$ – 3 pcs
- Installation trough cover - polystyrene
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Self-adhesive waterproofing tape
- The shower drain is assembled with the odour trap

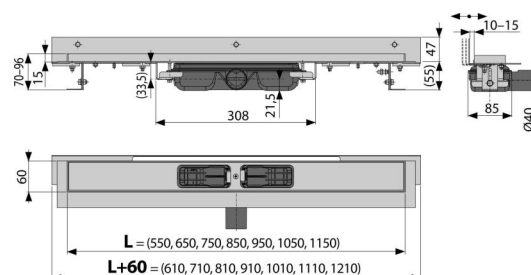

Order number, Logistic information

| Code | EAN | Weight (piece packing palett) | Dimensions (piece packing) | Quantity (packing palett) |
|------------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APZ104-850 | 8595580505936 | 850 mm 4,36 34,89 124,7 kg | 920x160x205 mm | 8 24 pcs |

Warranty 2/25 years * Customs code 39229000

Technical specifications

- Total installation height 70-96 mm
- Minimum thickness of concrete 55 mm
- Resistance of odour trap against the pressure 575 Pa
- Waste pipe diameter 40 mm
- Movable flange range 10-15 mm
- Flow rate 35 l/min
- Load class K3 300 kg
- Odour trap 28 mm